




**ENERG**  
енергия · ενεργεια

Y IJA  
IE IA

**NIBE**

NIBE F2040-12



55 °C

35 °C



**A++**

**A++**



**35 dB**



**57 dB**

■ 13  
■ 10  
■ 12  
kW

■ 12  
■ 12  
■ 12  
kW



2015




811/2013



**ENERG** Y IJA  
 енергия · ενεργεια IE IA



NIBE F2040-12 + VVM320

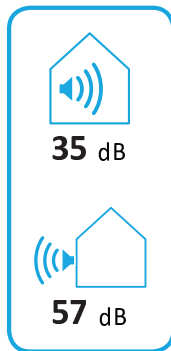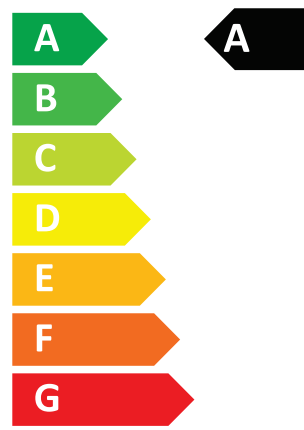

2015

811/2013



# ENERG

енергия · ενεργεια

Y

IJA

IE

IA

**NIBE**

## NIBE F2040-12 + VVM320

 35 °C



**A<sup>++</sup>**

**A<sup>+++</sup>**

**A<sup>+++</sup>**

**A<sup>++</sup>**

**A<sup>+</sup>**

**A**

**B**

**C**


**D**

**E**

**F**

**G**

+



+



+



+





# ENERG

енергия · ενεργεια

Y






IJA


IE


IA


**NIBE**


## NIBE F2040-12 + VVM320








+ 






+ 

+ 

+ 




55 °C

Supplier's name:	<b>NIBE</b>		
Model:	<b>NIBE F2040-12+ VVM 320</b>		
Temperature application	<b>35</b>	<b>55</b>	°C
Declared load profile for water heating	<b>XL</b>		
Seasonal space heating energy efficiency class, average climate:	<b>A++</b>	<b>A++</b>	
Water heating energy efficiency class, average climate:	<b>A</b>		
Rated heat output, average climate:	11,5	10,0	kW
Annual energy consumption for space heating, average climate	5382	6136	kWh
Annual electricity consumption for water heating, average climate	1702		kWh
Seasonal space heating energy efficiency, average climate:	174	132	%
Water heating energy efficiency, average climate:	98		%
Sound power level LWA indoors	35		dB
Rated heat output, cold climate:	11,5	13,0	kW
Rated heat output, warm climate:	12,0	12,0	kW
Annual energy consumption for space heating, cold climate	7798	11197	kWh
Annual electricity consumption for water heating, cold climate	1904		kWh
Annual energy consumption for space heating, warm climate	2759	3419	kWh
Annual electricity consumption for water heating, warm climate	1551		kWh
Seasonal space heating energy efficiency, cold climate:	142	111	%
Water heating energy efficiency, cold climate:	88		%
Seasonal space heating energy efficiency, warm climate:	229	185	%
Water heating energy efficiency, warm climate:	108		%
Sound power level LWA outdoors	57		dB

#### Data for package fiche

Controller class	VI		
Controller contribution to efficiency	4,0		%
Seasonal space heating energy efficiency of package, average climate:	178	136	%
Seasonal space heating energy efficiency class for package, average climate:	<b>A+++</b>	<b>A++</b>	%
Seasonal space heating energy efficiency of package, cold climate:	146	115	%
Seasonal space heating energy efficiency of package, warm climate:	233	189	%

<b>Model(s):</b>		<b>NIBE F2040-12+ VVM 320</b>								
Type of heat source/sink:		Air-to-water								
Low-temperature heat pump:		No								
Equipped with supplementary heater:		Yes								
Heat pump combination heater:		Yes								
Climate condition:		Average								
Temperature application:		Medium temperature (55 °C)								
Applied standards: EN14825 and EN16147										
<b>Rated heat output</b>		Prated	10,0	kW	<b>Seasonal space heating energy efficiency</b>		$\eta_s$	132	%	
<i>Declared capacity for part load at outdoor temperature Tj</i>				<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>						
Tj = -7 °C	Pdh	8,9	kW	Tj = -7 °C	COPd	1,99	kW			
Tj = +2 °C	Pdh	5,5	kW	Tj = +2 °C	COPd	3,22	kW			
Tj = +7 °C	Pdh	3,5	kW	Tj = +7 °C	COPd	4,61	kW			
Tj = +12 °C	Pdh	5,0	kW	Tj = +12 °C	COPd	6,25	kW			
Tj = biv	Pdh	9,2	kW	Tj = biv	COPd	1,90	kW			
Tj = TOL	Pdh	8,1	kW	Tj = TOL	COPd	1,92	kW			
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)	COPd		kW			
Bivalent temperature				T <sub>biv</sub>	-7,9	°C	Operation limit temperature			
Cycling interval capacity for heating				P <sub>cyc</sub>		kW	Cycling interval efficiency		COP <sub>cyc</sub>	-
Degradation co-efficient				C <sub>dh</sub>	0,98	-	Heating water operating limit		WTOL	58
<i>Power consumption in modes other than active mode</i>				<i>Supplementary heater</i>						
Off mode	P <sub>OFF</sub>	0,002	kW	Rated heat output		P <sub>sup</sub>	1,9	kW		
Thermostat-off mode	P <sub>TO</sub>	0,014	kW							
Standby mode	P <sub>SB</sub>	0,015	kW	Type of energy input		Electric				
Crankcase heater mode	P <sub>CK</sub>	0,035	kW							
<i>Other items</i>										
Capacity control		variable			Rated air flow rate, outdoors			4380	m <sup>3</sup> /h	
Sound power level, indoors/outdoors		L <sub>WA</sub>	35/57	dB	Rated water flow rate, indoor heat exchanger			0,86	m <sup>3</sup> /h	
Annual energy consumption		Q <sub>HE</sub>	6136	kWh	Rated brine or water flow rate, outdoor heat exchanger				m <sup>3</sup> /h	
<i>For heat pump combination heater:</i>										
<b>Declared load profile</b>		<b>XL</b>			<b>Water heating energy efficiency</b>		$\eta_{wh}$	98	%	
Daily electricity consumption		Q <sub>elec</sub>	7,75	kWh	Daily fuel consumption		Q <sub>fuel</sub>		kWh	
Annual electricity consumption		AEC	1702	kWh	Annual fuel consumption		AFC		GJ	
<b>Approved by:</b>										
<b>Contact details</b>		© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden								