



ENERG
енергия · ενέργεια



NIBE

NIBE F2040-16



55 °C

35 °C



A++

A++



35 dB



61 dB

■ 16
■ 14
■ 15
kW

■ 15
■ 15
■ 15
kW



2015

811/2013



ENERG
енергия · ενεργεια

Y IJA
IE IA

NIBE


NIBE F2040-16 + VVM310




55°C





XL

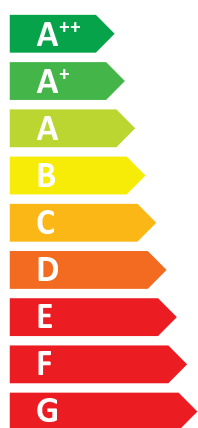

A++

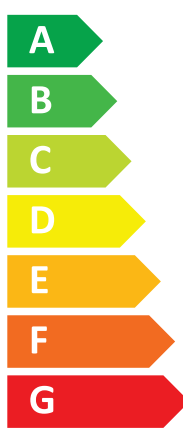

A

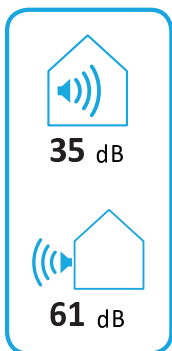

2015

811/2013



ENERG

енергия · ενεργεια

Y

IJA

IE

IA

NIBE

NIBE F2040-16

 35 °C



A⁺⁺

A⁺⁺⁺

A⁺⁺⁺

A⁺⁺

A⁺

A

B

C


D

E

F

G

+



+



+



+





ENERG

енергия · ενέργεια

Y







IJA

IE



IA


NIBE


NIBE F2040-16 + VVM310










55 °C







+ 

+ 

+ 


+ 

Supplier's name:	NIBE		
Model:	NIBE F2040-16+ VVM 310		
Temperature application	35	55	°C
Declared load profile for water heating	XL		
Seasonal space heating energy efficiency class, average climate:	A++	A++	
Water heating energy efficiency class, average climate:	A		
Rated heat output, average climate:	14,5	14,0	kW
Annual energy consumption for space heating, average climate	6702	8431	kWh
Annual electricity consumption for water heating, average climate	1702		kWh
Seasonal space heating energy efficiency, average climate:	176	134	%
Water heating energy efficiency, average climate:	98		%
Sound power level LWA indoors	35		dB
Rated heat output, cold climate:	15,0	16,0	kW
Rated heat output, warm climate:	15,0	15,0	kW
Annual energy consumption for space heating, cold climate	10040	13629	kWh
Annual electricity consumption for water heating, cold climate	1904		kWh
Annual energy consumption for space heating, warm climate	3370	4183	kWh
Annual electricity consumption for water heating, warm climate	1551		kWh
Seasonal space heating energy efficiency, cold climate:	144	113	%
Water heating energy efficiency, cold climate:	88		%
Seasonal space heating energy efficiency, warm climate:	235	189	%
Water heating energy efficiency, warm climate:	108		%
Sound power level LWA outdoors	61		dB

Data for package fiche

Controller class	VI		
Controller contribution to efficiency	4,0		%
Seasonal space heating energy efficiency of package, average climate:	180	138	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A++	%
Seasonal space heating energy efficiency of package, cold climate:	148	117	%
Seasonal space heating energy efficiency of package, warm climate:	239	193	%

Model(s):				NIBE F2040-16+ VVM 310								
Type of heat source/sink:				Air-to-water								
Low-temperature heat pump:				No								
Equipped with supplementary heater:				Yes								
Heat pump combination heater:				Yes								
Climate condition:				Average								
Temperature application:				Medium temperature (55 °C)								
Applied standards: EN14825 and EN16147												
Rated heat output				Prated	14,0	kW		Seasonal space heating energy efficiency				
								η_s	134	%		
<i>Declared capacity for part load at outdoor temperature Tj</i>								<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>				
Tj = -7 °C	Pdh	12,5	kW		Tj = -7 °C	COPd	2,01	kW				
Tj = +2 °C	Pdh	7,6	kW		Tj = +2 °C	COPd	3,29	kW				
Tj = +7 °C	Pdh	4,9	kW		Tj = +7 °C	COPd	4,68	kW				
Tj = +12 °C	Pdh	6,8	kW		Tj = +12 °C	COPd	6,51	kW				
Tj = biv	Pdh	12,7	kW		Tj = biv	COPd	1,95	kW				
Tj = TOL	Pdh	11,0	kW		Tj = TOL	COPd	1,95	kW				
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW		Tj = -15 °C (if TOL < -20 °C)	COPd		kW				
Bivalent temperature				T _{biv}	-7,6	°C		Operation limit temperature				
Cycling interval capacity for heating				P _{cyc}		kW		Cycling interval efficiency				
Degradation co-efficient				Cdh	0,98	-		Heating water operating limit				
								WTOL	58	°C		
<i>Power consumption in modes other than active mode</i>								<i>Supplementary heater</i>				
Off mode	P _{OFF}	0,002	kW		Rated heat output				P _{sup}	3,0	kW	
Thermostat-off mode	P _{TO}	0,016	kW									
Standby mode	P _{SB}	0,015	kW		Type of energy input				Electric			
Crankcase heater mode	P _{CK}	0,035	kW									
<i>Other items</i>												
Capacity control	variable							Rated air flow rate, outdoors				
									6000	m ³ /h		
Sound power level, indoors/outdoors	L _{WA}	35/61	dB		Rated water flow rate, indoor heat exchanger					1,21	m ³ /h	
Annual energy consumption	Q _{HE}	8431	kWh		Rated brine or water flow rate, outdoor heat exchanger						m ³ /h	
<i>For heat pump combination heater:</i>												
Declared load profile				XL				Water heating energy efficiency				
								η_{wh}				
								98				
								%				
Daily electricity consumption	Q _{elec}	7,75	kWh		Daily fuel consumption				Q _{fuel}		kWh	
Annual electricity consumption	AEC	1702	kWh		Annual fuel consumption				AFC		GJ	
Approved by:												
Contact details				© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden								